



Ph Free

RoHS Compliant

**Features**

- Compact and low profile (5×3.2×1.2mm)
- Surface mount type suitable for auto pick-and-place
- Reflow soldering compatible
- CMOS, TTL IC direct drive is possible
- With tri-state function
- Supply voltage Vcc=3.3/ 5.0V available

**Frequency Tolerance (Overall)**

Freq. Tol. Code	× 10 <sup>-6</sup>	Operating Temperature Range (°C)	Note
1	±100	-10 to +70 (standard)	1.8 to 50MHz
0	± 50		1.8 to 32MHz
S	± 30		1.8 to 32MHz

**How to Order**

**KC5032D 25.0000 C 3 1 B 00**  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Type
- ② Output Frequency
- ③ Output Type (CMOS)
- ④ Supply Voltage 5=5.0V, 3=3.3V
- ⑤ Frequency Tolerance (See table at left)
- ⑥ Symmetry/ Enable Function  
 A: 40/ 60%, Disable  
 B: 40/ 60%, Stand-by
- ⑦ Customer Special Model Suffix (STD Specification is "00")

**Symmetry/ Enable Function**

Freq. (MHz)	Code	
	KC5032D-C5	KC5032D-C3
1.8 to 50	A	B


**Specifications**

Item	Symbol	Specifications		Units
		KC5032Dxx.xxxxC5xA00 (FXO-61F2)	KC5032Dxx.xxxxC3xB00 (FXO-61FL2)	
Output Frequency Range	fo	1.8 to 50		MHz
Frequency Tolerance (Overall)	f <sub>tol</sub>	±30 (to 32MHz)		×10 <sup>-6</sup>
		±50 (to 32MHz)		
		±100 (to 50MHz)		
Storage Temperature Range	T <sub>stg</sub>	-40 to +85		°C
Operating Temperature Range	T <sub>use</sub>	-10 to +70		°C
Max. Supply Voltage	—	7 max.		V
Supply Voltage	V <sub>cc</sub>	5±0.5	3.3±0.3	V
Current Consumption	I <sub>cc</sub>	25 max.	18 max. (1.8 to 39.9MHz)	mA
			25 max. (40 to 50MHz)	
Stand-by Current	I <sub>std</sub>	10 max.		µA
Symmetry	SYM	40 to 60@50%V <sub>cc</sub>		%
Rise/ Fall Time	tr/ tf	10 max.		nS
Low Level Output Voltage	V <sub>OL</sub>	10% V <sub>cc</sub> max.		V
High Level Output Voltage	V <sub>OH</sub>	90% V <sub>cc</sub> min.		V
CMOS Load	L <sub>CMOS</sub>	15 max.	20 max.	pF
Input Voltage Range	V <sub>IN</sub>	0 to V <sub>cc</sub>		V
Low Level Input Voltage	V <sub>IL</sub>	0.8 max.		V
High Level Input Voltage	V <sub>IH</sub>	2.2 min.		V
Disable Time	t <sub>dis</sub>	150 max.		nS
Enable Time	t <sub>ena</sub>	5 max.		mS
Start-up Time	t <sub>str</sub>	10 max.		mS

Note: All electrical characteristics are defined at the maximum load and operating temperature range.  
 Please contact us for inquiry about operating temperature range, available frequencies and other conditions.

**Dimensions**

(Unit: mm)

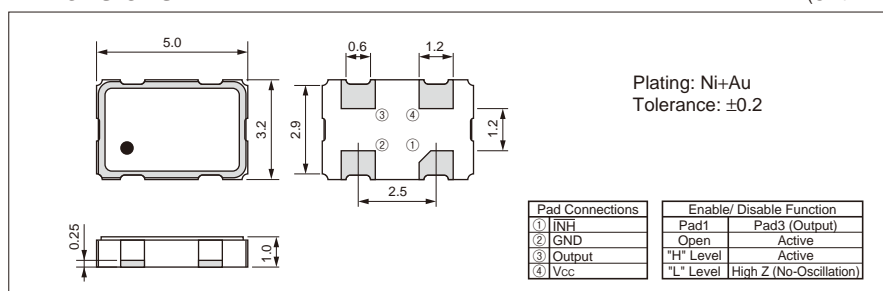

**Recommended Land Pattern**

(Unit: mm)

