



Pb Free

RoHS Compliant

Features

- Low voltage 2.5V
- Low jitter
- LV-PECL output
- Operation at fundamental high frequency
- ±50×10⁻⁶ Available

How to Order

KC7050T 312.500 P 2 0 E 00
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Type (7.0×5.0mm SMD)
- ② Output Frequency
- ③ Output Type (PECL)
- ④ Supply Voltage (2.5V)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ Enable Function (45/ 55%, Stand-by)
- ⑦ Customer Special Model Suffix (STD Specification is "00")

Packaging (Tape & Reel 1000 pcs./ reel)

Table 1

Freq. Tol. Code	× 10 ⁻⁶	Operating Temperature Range (°C)	Note
0	± 50	0 to +70	Standard specifications
1	±100	0 to +70	With only certain frequencies
A	±100	-5 to +85	


Specifications

Item	Symbol	Conditions	Min.	Max.	Units
Output Frequency Range	fo		150	700	MHz
Frequency Tolerance	f _{tol}	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration	Op. Temp.: 0 to +70°C -50 Op. Temp.: 0 to +70°C -100 Op. Temp.: -5 to +85°C -100	+50 +100 +100	×10 ⁻⁶
Storage Temperature Range	T _{stg}		-55	+125	°C
Operating Temperature Range	T _{use}	Standard Specifications	0	+70	°C
Max. Supply Voltage	—		-0.5	+5	V
Supply Voltage	V _{CC}	2.5V	2.375	2.625	V
Current Consumption (Standard Loaded)	I _{CC}		—	90	mA
Symmetry	SYM		45	55	%
Rise/ Fall Time (20% to 80% Output Level Standard Loaded)	tr/ tf		—	600	pS
Low Level Output Voltage	V _{OL}	0 to +85°C/ Typ. 0.800V -5 to 0°C/ Typ. 0.805V	V _{CC} -1.810 V _{CC} -1.830	V _{CC} -1.405 V _{CC} -1.305	V
High Level Output Voltage	V _{OH}	0 to +85°C/ Typ. 1.550V -5 to 0°C/ Typ. 1.495V	V _{CC} -1.025 V _{CC} -1.085	V _{CC} -0.740 V _{CC} -0.880	V
Output Load (PECL)	RL	PECL 50Ω @Terminated V _{CC} -2V	49.5	50.5	ohm
Input Voltage Range	V _{IN}		0	V _{CC}	V
Low Level Input Voltage	V _{IL}		—	30% V _{CC}	V
High Level Input Voltage	V _{IH}		70% V _{CC}	—	V
Disable Time	t _{dis}		—	200	nS
Enable Time	t _{ena}		—	10	mS
Start-up Time	t _{str}	@ Minimum operating voltage to be 0 sec.	—	10	mS
Deterministic Jitter (DJ)	DJ			0.2 typ.	pS
1 Sigma Jitter	J _{Sigma}	Measured with Wavecrest DTS-2079 VISI/ 6.3.1		2 typ.	pS
Peak to Peak Jitter	J _{PK-PK}			20 typ.	pS

Note: All electrical characteristics are defined at the maximum load and operating temperature range.
 Please contact us for inquiry about operating temperature range, available frequencies and other conditions.

Dimensions

(Unit: mm)

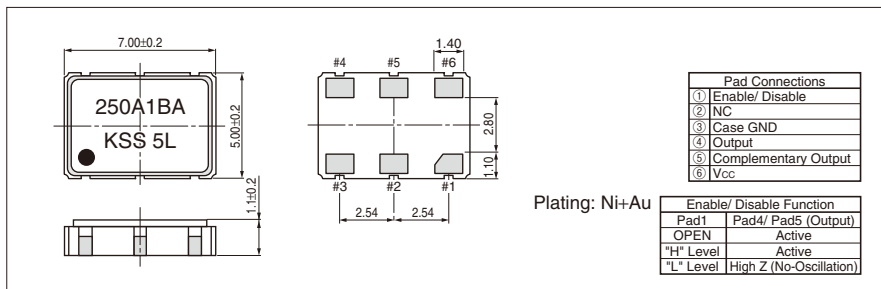

Recommended Land Pattern

(Unit: mm)

