

SAW Duplexers SD18 Series (Balanced Type)



RoHS Compliant

Features

- Small size
- Low loss, high isolation
- Rx balanced output type

Applications

- LTE
 - UMTS (W-CDMA)
 - CDMA
- Individual specification for LTE.

How to Order

SD 18 - 1950 R 8 UB Q1
① ② ③ ④ ⑤ ⑥ ⑦


- ① Type of Product (SAW Duplexer)
- ② Package Size
- ③ Nominal Center Frequency
- ④ Spec.
- ⑤ Number of Terminals
- ⑥ Input/ Output
- ⑦ Custom Specification

Specifications


Part No.	Band	Condition	Pass Band Frequency	Insertion Loss (dB)	Pass Band Variation (dB)	VSWR	Absolute Rejection (dB)										Isolation Tx to Rx (dB)	Operating Temperature	Storage Temperature
							Differential Mode	Common Mode											
SD18-1950R8UBQ1	Band1	Tx to Ant	1920.48MHz - 1979.52MHz	2.0 max.	0.5 max.	2.0 max.	843MHz 894MHz 44 min.	1573.374MHz 1577.466MHz 42 min.	1805MHz 1865MHz 25 min.	1865MHz 1880MHz 10 min.	2010MHz 2025MHz 5 min.*1	2110MHz 2170MHz 44 min.	2400MHz 2500MHz 36 min.	1920.48MHz 1979.52MHz 53 min.	1920.48MHz 1979.52MHz 50 min.	-30 to +85°C	-40 to +85°C		
		Ant to Rx	2110.48MHz - 2169.52MHz	2.5 max.	0.5 max.	2.0 max.	1920MHz 1980MHz 45 min.	1980MHz 2025MHz 15 min.	2255MHz 2400MHz 15 min.	2400MHz 2484MHz 30 min.	2484MHz 6000MHz 35 min.	-	-	-	-				
SD18-1880R8UBA1	Band2	Tx to Ant	1850.48MHz - 1909.52MHz	2.4 max.*2 (1852.4-1907.6MHz) 2.5 max.*3 (1851.25-1902.75MHz)	1.8 max.	2.1 max.	869MHz 894MHz 40 min.	1573.374MHz 1577.466MHz 45 min.	2400MHz 2500MHz 30 min.	5150MHz 5350MHz 20 min.	-	-	-	1852.4MHz 1852.4MHz 53 min.*2	1852.4MHz 1907.6MHz 46 min.*2	-30 to +85°C	-40 to +85°C		
		Ant to Rx	1930.48MHz - 1989.52MHz	3.4 max.*2 (1932.4-1987.6MHz) 3.5 max.*3 (1931.25-1982.75MHz)	2.5 max.	2.0 max.	1MHz 1850MHz 30 min.	1765MHz 1835MHz 35 min.	1852.4MHz 1907.6MHz 48 min.*2	1851.25MHz 1908.75MHz 47 min.*3	2400MHz 2484MHz 30 min.	5625MHz 5815MHz 30 min.	-	-	-				
SD18-0836R8UBQ1	Band5	Tx to Ant	824MHz - 849MHz	2.0 max.	1.0 max.	2.0 max.	869MHz 894MHz 44 min.	1573.374MHz 1577.466MHz 45 min.	1638MHz 1708MHz 40 min.	1844.9MHz 1879.9MHz 30 min.	1884.5MHz 1919.6MHz 30 min.	1930MHz 1990MHz 44 min.	2400MHz 2557MHz 45 min.	824MHz 849MHz 55 min.	824MHz 849MHz 50 min.	-30 to +85°C	-40 to +85°C		
		Ant to Rx	869MHz - 894MHz	2.2 max.	1.2 max.	2.0 max.	824MHz 849MHz 30 min.	849MHz 854MHz 45 min.	854MHz 1000MHz 10 min.	1850MHz 1850MHz 28 min.	1920MHz 1920MHz 40 min.	6000MHz 6000MHz 35 min.	-	-	-				
SD18-2535R8UBM1	Band7	Tx to Ant	2500MHz - 2570MHz	3.0 max.	2.0 max.	2.0 max.	925MHz 960MHz 30 min.	1573.374MHz 1577.466MHz 32 min.	1805MHz 1830MHz 35 min.	1710MHz 1785MHz 28 min.	2402MHz 2442MHz 30 min.	2402MHz 2442MHz 40 min.	2500MHz 2500MHz 45 min.	-	-	-20 to +85°C	-40 to +85°C		
		Ant to Rx	2620MHz - 2690MHz	2.5 max.	1.5 max.	2.0 max.	880MHz 915MHz 37 min.	1710MHz 1785MHz 35 min.	2402MHz 2482MHz 41 min.	2500MHz 2570MHz 45 min.	2775MHz 3000MHz 35 min.	4900MHz 5300MHz 47 min.	5300MHz 5950MHz 40 min.	2620MHz 2620MHz 51 min.	2500MHz 2570MHz 44 min.				
SD18-0897R8UBQ1	Band8	Tx to Ant	882.4MHz - 912.6MHz	2.7 max.*2	2.0 max.	2.0 max.	927.4MHz 957.6MHz 44 min.*2	1573.374MHz 1577.466MHz 43 min.*2	1760MHz 1830MHz 38 min.	2400MHz 2500MHz 35 min.	2620MHz 2745MHz 35 min.	-	-	882.4MHz 912.6MHz 55 min.*2	882.4MHz 912.6MHz 49 min.*2	-20 to +85°C	-40 to +85°C		
		Ant to Rx	925MHz - 960MHz	3.3 max.	2.0 max.	2.0 max.	10MHz 880MHz 35 min.	882.4MHz 912.6MHz 45 min.*2	1045MHz 1750MHz 15 min.	1750MHz 4810MHz 35 min.	-	-	-	-	-				

*1 Operating Temperature of +15 to +85°C *2 Integrated calculation, WCDMA Modulation (±1.92MHz). Unit : dBint
*3 Integrated calculation, NCDMA Modulation (±0.615MHz). Unit : dBint


Dimensions

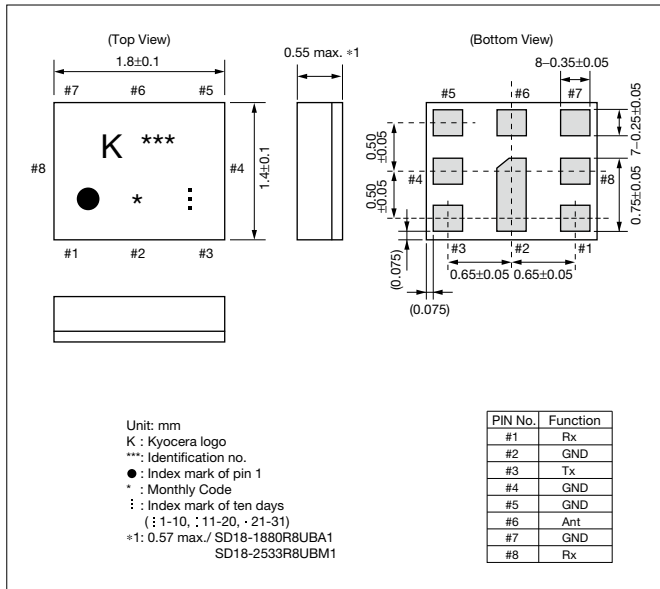

Recommended Land Pattern

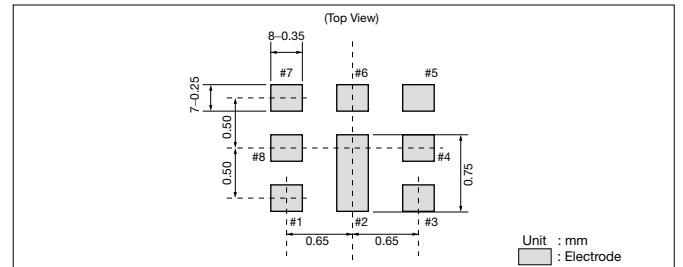



Test Circuit

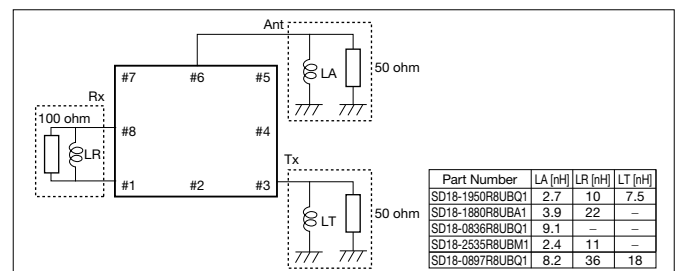



Characteristics

<Band2> Part No.: SD18-1880R8UBA1



Tx to Ant

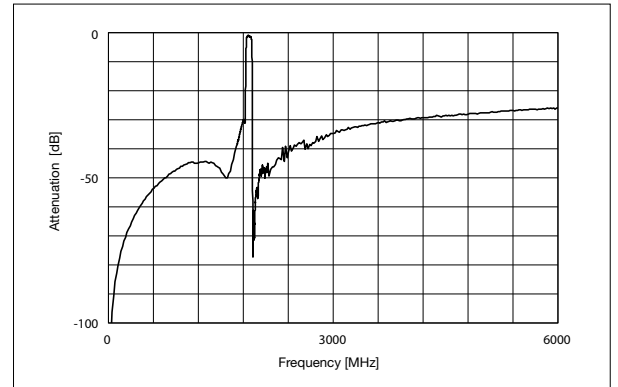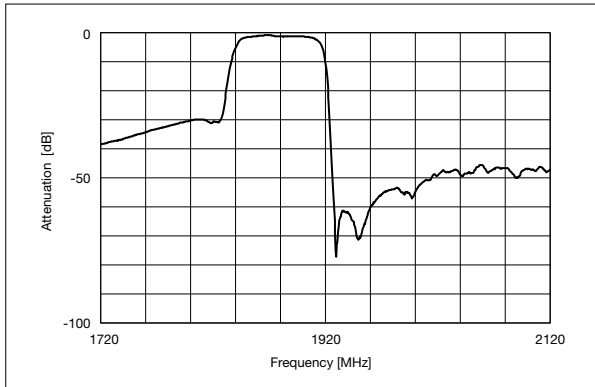


Ant to Rx

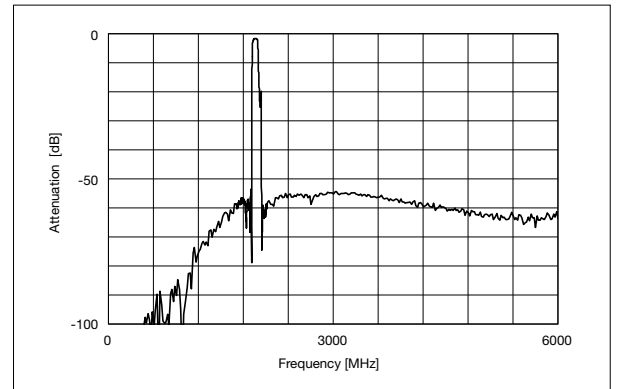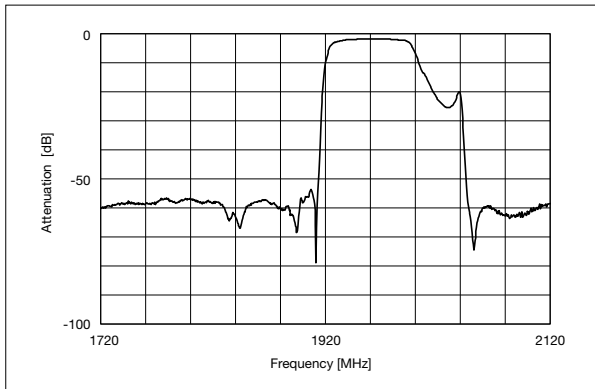

Tx to Rx

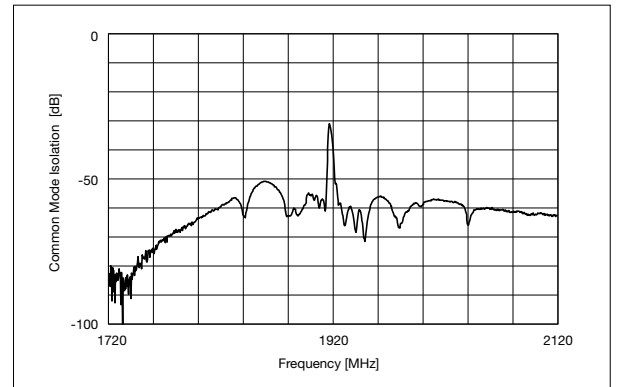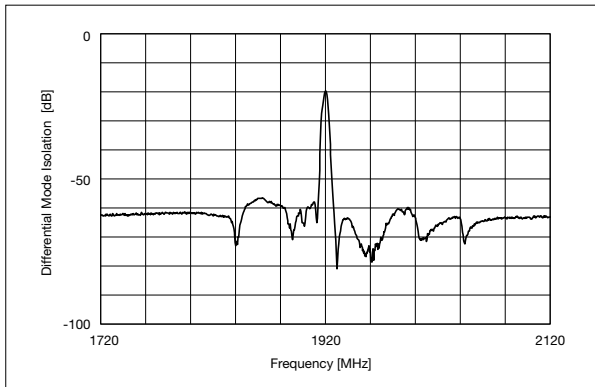

Recommended Reflow Profile

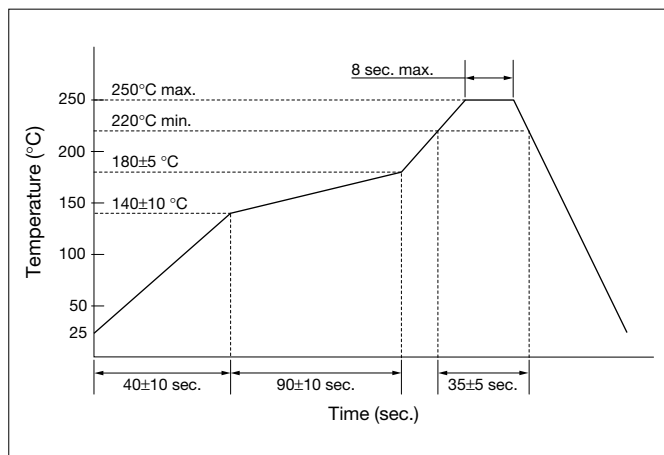

1. Operating Environment

- 1) Use products within the rated operating temperature, otherwise it may not satisfy electrical characteristics specifications. It might work initially, but there is a high possibility that it will cause degradation, breakdown and lower reliability.
- 2) This product is designed and manufactured with intention to be used in electronic devices for standard applications, but not in the following environment which may affect performance of the product. Be sure not to use products in the following conditions which may cause electrical characteristics and reliability degradation.
 - Under corrosive gas (Cl₂, H₂S, NH₃, SO_x, NO_x, etc.)
 - Under volatile and inflammability gas
 - Dusty environment
 - Direct exposure to water, or high humidity environment
 - Direct sunlight
 - High static electricity, or high electric intensity.

Please consult with us if you intend to use products in the above environment.

- 3) This product can not be used in liquid such as water, oil, chemical and organic solvent.
- 4) Operate under rated voltage, otherwise it may not satisfy electrical characteristics specifications. It might work initially, but there is high possibility that it will cause degradation, breakdown and lower the reliability.
- 5) Avoid contact with other components on the board, since outer resin is not intended for the insulation with other components.
- 6) There might be a strong electrical charge when rapid thermal change is applied to this product. This charge may damage the product and the peripheral circuit. Therefore, insert load discharge path between input/output and ground.
- 7) Do not apply larger load greater than the one loaded in the environmental test. It might work initially, but there is a high possibility that it will cause degradation, breakdown and lower the reliability.
- 8) Do not use transfer mold for this product. It may break hermetic seal and cause abnormal operation. Please consult us when molding by resin.

2. Storage instructions

- 1) Do not store products in the following environment which may deteriorate solderability.
 - Under corrosive gas (Cl₂, H₂S, NH₃, SO_x, NO_x, etc.)
 - Under volatile and inflammability gas
 - Dusty environment
 - Direct exposure to water, or high humidity environment
 - Direct sunlight
 - High static electricity, or high electric intensity

Please consult with us if you intend to use products in the above environment.

- 2) Store products under normal temperature and humidity in the sealed or unopened package.
Storage of products for over 12months after shipment may deteriorate solderability, and it is advised to perform solderability test before use. Also, be cautioned that color of electrode might change after a long term storage.
- 3) Open the sealed pack just before use.
Practice assembly within 168 hours after opening the pack, and in the condition of 5-30deg.C and below 60%RH.
- 4) Stacking the box too high may cause fall over. It is advised to stack the box at the maximum of 5 boxes.

3. Handling instructions

- 1) Do not apply larger vibration or shock greater than specified, since it may cause degradation, breakdown and lower reliability.
- 2) Do not apply larger shock or load greater than specified, while carrying the board with products mounted.
- 3) Take appropriate measure to avoid static electricity and high voltage when handling products, since it may cause degradation or damage to the products.
- 4) Do not handle this product with bear hands.

4. Assembly instructions

- 1) Place products in the place to avoid stress from bending and camber of the board.
There may be a large stress or shock when the product is placed near the connection parts with other outer parts.
- 2) Please do not apply larger stress greater than the one loaded in the environmental test when mounting on the board.
- 3) Make sure to solder all electrodes to the board, otherwise it may cause lower electrode strength.

Tape & Reel Specifications

SAW Duplexers/ SAW Filters

(Unit: mm)

		SAW Duplexers		SAW Filters				
		SD18	SD20	SF14	SF15	SF16	SF18	SF20
T A P E	A	2.0±0.05	2.0±0.05	2.0±0.05	2.0±0.05	2.0±0.05	2.0±0.05	2.0±0.05
	B	4.0±0.1	4.0±0.1	4.0±0.1	4.0±0.1	4.0±0.1	4.0±0.1	4.0±0.1
	C	φ1.5±0.1/ -0	1.5±0.1	φ1.5±0.1	1.5±0.1	1.5±0.1	φ1.5±0.1/ -0	1.5±0.1
	D	4.0±0.1	4.0±0.1	4.0±0.1	4.0±0.1	4.0±0.1	4.0±0.1	4.0±0.1
	E	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05
	F	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1
	G	8.0±0.1	8.0±0.2	8.0±0.2	8.0±0.2	8.0±0.2	8.0±0.1	8.0±0.2
	H	φ0.8±0.05	1.1±0.1	φ0.5±0.05	0.5±0.1	1.1±0.1	φ0.8±0.05	1.1±0.1
	J	2.05±0.1	2.25±0.1	1.7±0.1	1.80±0.1	1.90±0.1	2.05±0.1	2.25±0.1
	L	1.7±0.1	1.8±0.1	1.4±0.1	1.4±0.1	1.85±0.1	1.7±0.1	1.8±0.1
	N	0.85+0/ -0.5	0.7±0.1	0.8±0.1	0.7±0.1	0.95±0.2	0.85+0/ -0.5	0.7±0.1
O	0.2±0.05	0.2±0.05	0.2±0.05	0.2±0.05	0.25±0.05	0.2±0.05	0.2±0.05	
R E E L	P	φ178±2	φ178±2	φ178±2	φ178±2	φ178±2	φ178±2	φ178±2
	Q	φ60±2	φ60±2	φ60±2	φ60±2	φ60±2	φ60±2	φ60±2
	R	φ13±0.2	φ13±0.2	φ13±0.2	φ13±0.2	φ13±0.2	φ13±0.2	φ13±0.2
	S	φ21±0.8	φ21±0.8	φ21±0.8	φ21±0.8	φ21±0.8	φ21±0.8	φ21±0.8
	U	2±0.5	2±0.5	2±0.5	2±0.5	2±0.5	2±0.5	2±0.5
	W	9.5±1	9.5±1	9.5±1	9.5±1	9.5±1	9.5±1	9.5±1
Qty.		3000	3000	3000	3000	3000	3000	3000

