THE NEW VALUE FRONTIER

KYOCERA

Standard

5.7" Passive Matrix Color LCD Module

KCS057QV1AJ−G20

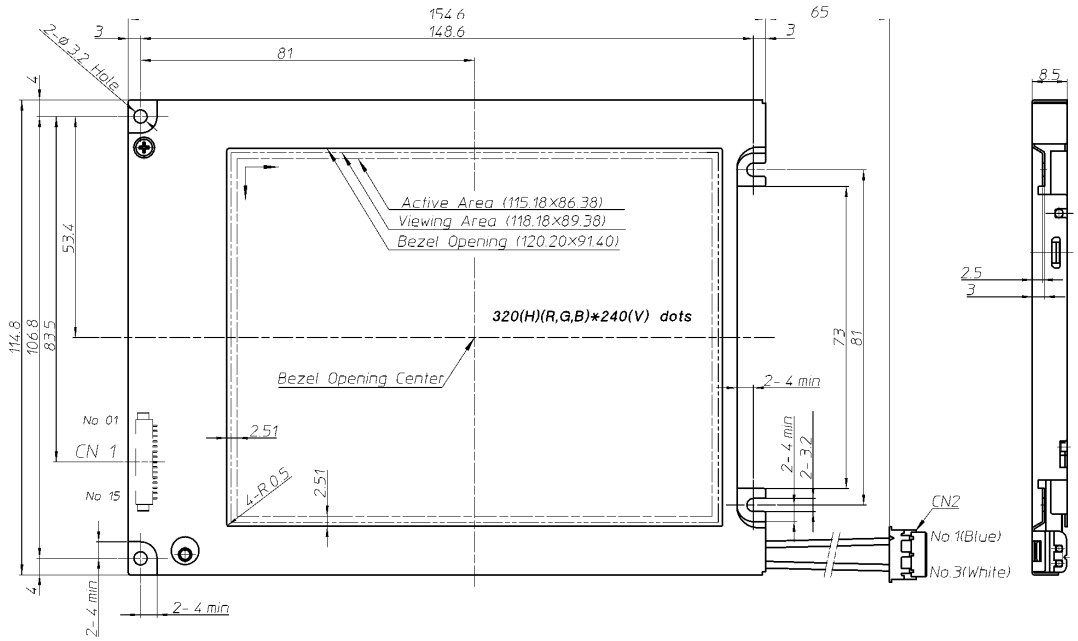

Features

- High Contrast Ratio 40:1
- High Brightness 200(cd/m²)
- Long Life CFL 40,000(h)
- Field Replaceable CFL
- Wide Temperature 0～60℃

Applications

- Display for Industrial Machine
- Measuring Instrument, Chart Recorder, Scale
- POS, ATM, Bank Terminal
- Fish Finder, GPS
- Sewing Machine, Musical Instrument

Specification

ITEM	SPECIFICATION	UNIT
Dot Format	(320×RGB)×240	dot
Dot Pitch	0.12×0.36	mm
Outline Dimensions	154.6×114.8×8.5	mm
Mass	200	g
Contrast Ratio	40:1	—
Brightness	200 (IL=5.0mA)	cd/m²
Response Time	330	ms
Viewing Angle(V/H)	60／100	deg.
Power Consumption	210 (LCD)	mW
	1.60 (Backlight)	W
Backlight	CFL (Single Tube)	—
Duty	1/240	—

ATTENTION : Specification subject to change without notice.
Please check the latest version of the product specification.

KYOCERA CORPORATION

LCD Division

6 Takeda Tobadono-cho, Fushimi-ku, Kyoto 612-8501 Japan
Phone:+81-75-604-3751 http://www.kyocera.co.jp/lcd/

■ KYOCERA INDUSTRIAL CERAMICS CORPORATION (USA)
Phone(Toll Free) : +1-800-826-0527 http://www.kyocera.com/
■ KYOCERA FINECERAMICS GmbH (GERMANY)
Phone : +49-711-939-3418 http://www.kyocera.de/
■ KYOCERA FINECERAMICS S.A. (FRANCE)
Phone : +33-1-45120239
■ KYOCERA FINECERAMICS LTD. (UK)
Phone : +44-1252-776000
■ KYOCERA ASIA PACIFIC PTE. LTD. (SINGAPORE)
Phone : +65-6271-0500
■ KYOCERA ASIA PACIFIC PTE. LTD. TAIPEI BRANCH (TAIWAN)
Phone : +886-2-2555-3609
■ KYOCERA ASIA PACIFIC LTD. (HONG KONG)
Phone : +852-2723-7183

May. 2003 ／ CWC14E−00